

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Display
Manufacturer: ViewSonic
Firmware Version: N/A
Model(s): CDP4237-L, CDP4737-L, CDP5537-L

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	10/29/2012	1.5.1	3.3.2	Initial version.

Driver Notes:

- Device ID on Display should be set to 1 for driver to work properly.
- When OSD is on, queries are disabled except for power in driver to prevent the OSD menu from flashing. In order to resume queries, OSD must be turned off through the driver.
- For MLC60 series support, the Device ID on the display must be 1.

IP Link® Device Interface Communication Sheet

Control Commands & States:

Aspect Ratio	Normal Just Scan	16:9	Zoom
Audio Mute	On	Off	
Auto Image	Execute		
Executive Mode	On	Off	
Horizontal Position	0-12		
Input	AV DVI (Digital) Display Port	Component HDMI DTV Display Port (DTV)	RGB HDMI PC
Keypad	0-9		
Menu Navigation	Menu Left Back	Up Right Exit	Down OK
On Screen Display	On	Off	
Power Control	On	Off	
Set ID	0-100		
Video Mute	On	Off	
Volume (Discrete)	0 to 100 in steps of 1		
Volume (Step)	Up	Down	

**IP Link® Device Interface
Communication Sheet****Status Available:**

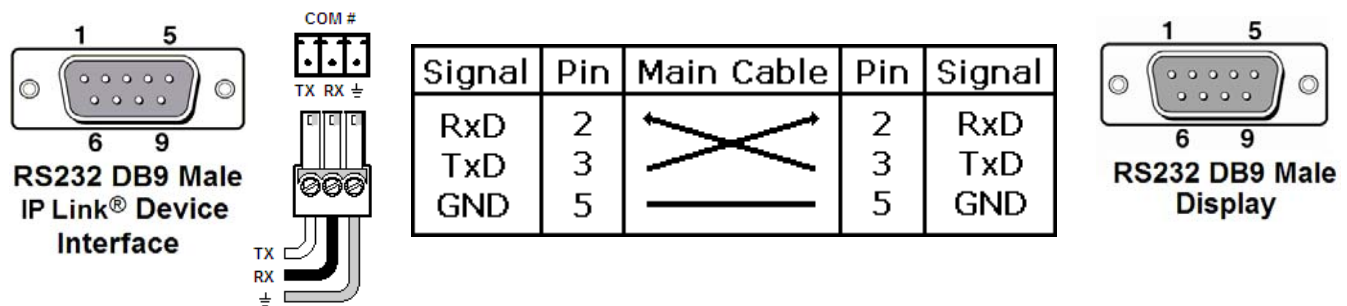
Aspect Ratio	Normal	16:9	Zoom
	Just Scan		
Audio Mute	On	Off	
Connection Status	Connected	Disconnected	
Executive Mode	On	Off	
Input	AV	Component	RGB
	DVI (Digital)	HDMI DTV	HDMI PC
	Display Port	Display Port (DTV)	
On Screen Display	On	Off	
Power Control	On	Off	
Power Status	On	Off	Status Unavailable
Video Mute	On	Off	
Volume (Discrete)	0 to 100 in steps of 1		

**IP Link® Device Interface
Communication Sheet*****MLC60 Series Supported Commands:***

Aspect Ratio	Normal Just Scan	16:9	Zoom
Audio Mute	On	Off	
Auto Image	Execute		
Executive Mode	On	Off	
Input	AV DVI (Digital) Display Port	Component HDMI DTV Display Port (DTV)	RGB HDMI PC
Keypad	0-9		
Menu Navigation	Menu Left Back	Up Right Exit	Down OK
On Screen Display	On	Off	
Power Control	On	Off	
Video Mute	On	Off	
Volume (Discrete)	0 to 100 in steps of 1		
Volume (Step)	Up	Down	

Cable and Adapter Requirements:

F/F RS-232 Null Modem Cable.

Notes for the Device:**Serial communication:****Port Type:** RS-232**Baud Rate:** 9600**Data Bits:** 8**Parity:** None**Stop Bits:** 1**Flow Control:** None**Pin Assignments Diagram:**

Note: Captive screw connector may also be used as a serial connection.

General Notes: